



INSTALLATION INSTRUCTIONS

Accessory

ALUMINUM ROOF
P/N 0SL90-HL6-A00

Application

SXS1000S2R
SXS1000S2X

Publication No.


MII 16561

Issue Date

March 2019

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

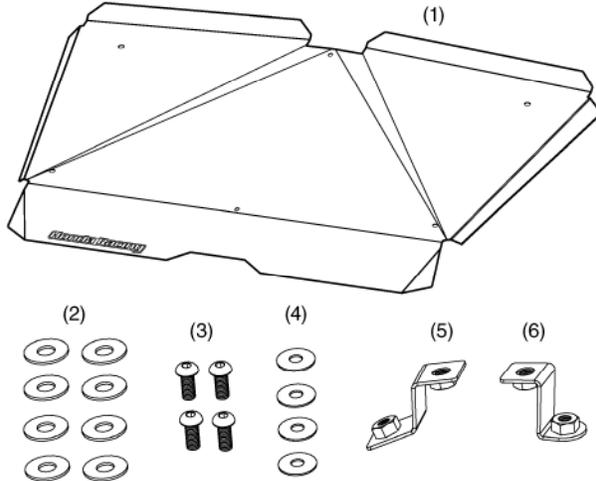

No.	Description	Qty
(1)	Aluminum roof	1
(2)	Rubber washer	8
(3)	20 mm hex head bolt	4
(4)	Steel washer	4
(5)	Front mounting bracket	1
(6)	Rear mounting bracket	1

TOOLS REQUIRED

5 mm hex wrench


USE AND CARE INFORMATION

- Check the accessory mounts frequently and retighten if necessary.
- Replace this accessory with a new one if it is damaged or discolored excessively.
- When this accessory becomes dirty, rinse it thoroughly with cool water to remove loose dirt and then wash with a clean cloth or sponge.
- Do not use a brush to clean this accessory as it may scratch the surface.
- Never use petroleum solvents such as gasoline, thinner, benzene, acid or alkaline cleaners.


INSTALLATION

⚠ CAUTION


1. Remove the four corner bolts and washers securing the original roof from the vehicle. Set aside hardware to be reinstalled.

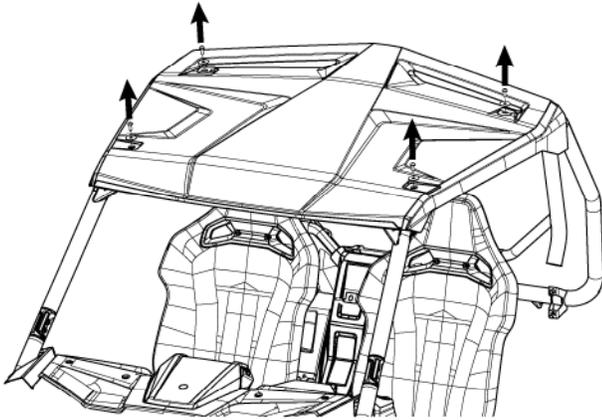


2. Remove the two bolts securing the roof on the inside of the vehicle. Remove the roof and set aside.

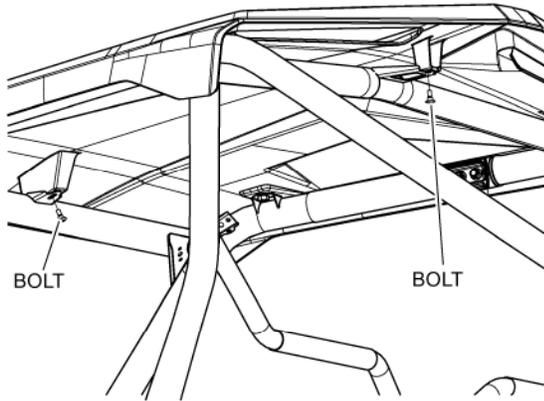

3. Install the front and rear mounting brackets to the inside of the OPS in the locations shown using two 20 mm hex head bolts and steel washers.

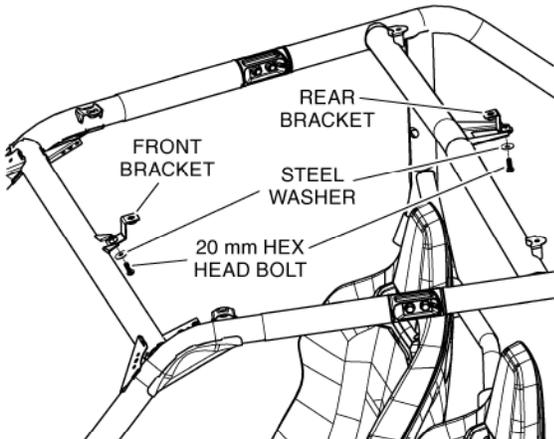

4. Place the aluminum roof over the top of the OPS. Loosely secure the roof in the two center locations using two 20 mm hex head bolts and steel washers as shown. Do not fully tighten the hardware at this time.

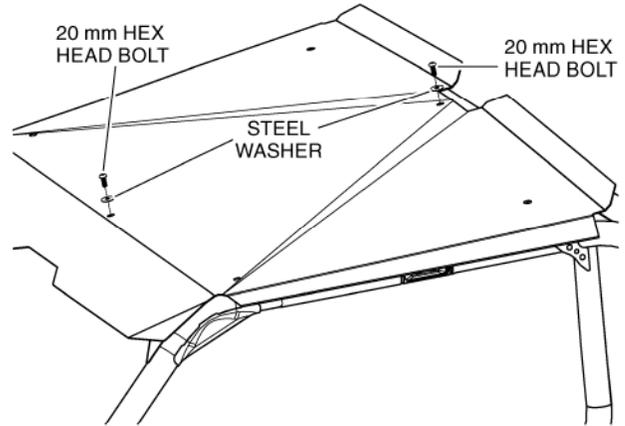

5. Secure the roof in the four outside locations using the original bolts and washers removed in Step 1, as well as two rubber washers in each location. Be sure to tighten all hardware securely.

NOTE: Place one rubber washer between the original washer and roof and the other rubber washer between the roof and frame as shown.

NOTE: The raised side of the original washer faces down towards the roof.

