



# INSTALLATION INSTRUCTIONS

Accessory

HALF CARGO BOX  
P/N 0SL52-HL6-A00

Application

SXS1000S2X  
SXS1000S2R

Publication No.


MII 16561

Issue Date


May 2019

Honda Dealer: Please give a copy of these instructions to your customer.


## PARTS LIST

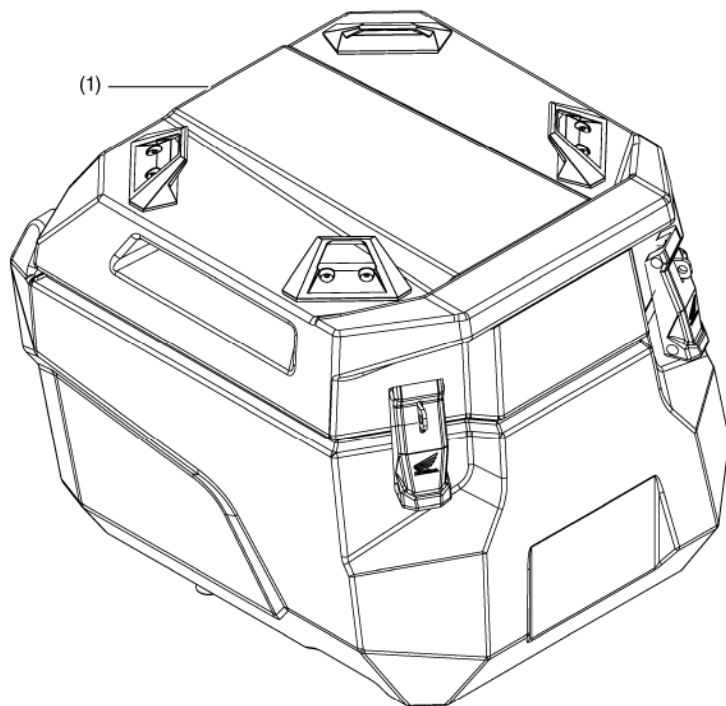

(5)



(2)



(3)



(4)


No.	Description	Qty
(1)	Cargo Box	1
(2)	Honda Pro-Connect™ latch	2
(3)	Rubber Spacer	2
(4)	Snap Ring	2
(5)	Installation Instruction URL	1

### MOUNT PLATE

Sold separately (P/N 0SL41-HL6-A00)

\*One mount plate needed for this accessory.

(1)

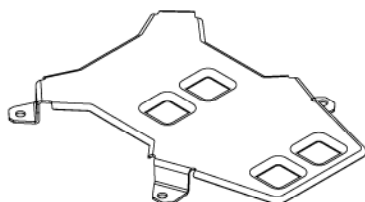

No.	Description	Qty
(1)	Mount plate	1

## TOOLS REQUIRED

Ratchet

Torque wrench

Hex wrench (5 mm)

## TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N-m	kgf-m	lbf-ft
5 mm shoulder bolt (Original bolt)	9	0.92	6.5


## INSTALLATION

### ⚠ CAUTION

To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


1. Remove the original hardware in the cargo area from the driver or passenger side.

«DRIVER SIDE SHOWN»

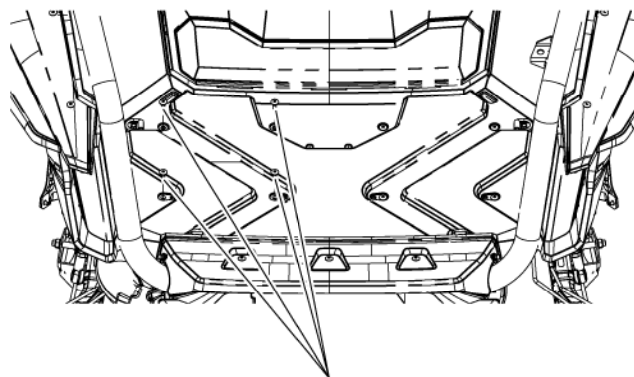



ORIGINAL HARDWARE (Reuse)

2. Install the mount plate in the cargo area using the original hardware as shown. Tighten all hardware to the specification in the Torque Chart.

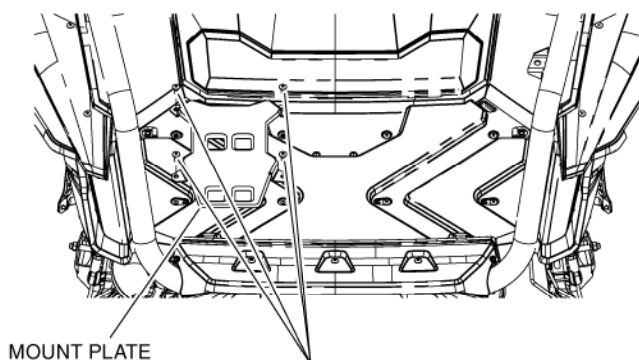


ORIGINAL HARDWARE

3. Install two Honda Pro-Connect™ latches in the cargo box using a rubber spacer between each latch and the box. Secure the latches to the cargo box by installing a snap ring onto each latch from underneath the box.

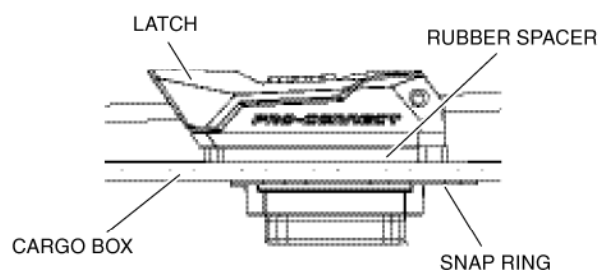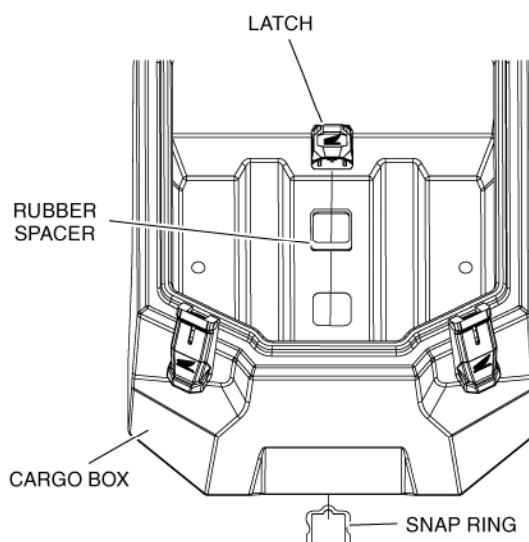

4. Lift the lever on each Honda Pro-Connect™ latch to unlock them. Place the cargo box onto the mount plate. Line up each latch with its corresponding hole in the mounting plate then push each latch into its hole.

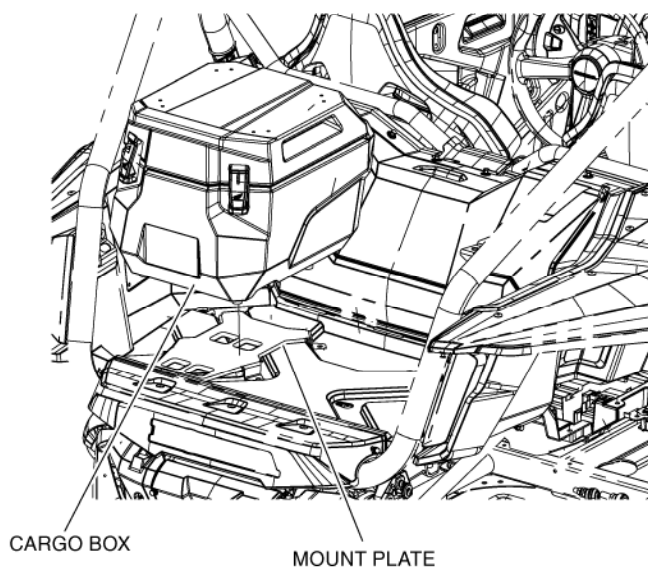

5. Secure the cargo box to the mounting plate by pressing down each Honda Pro-Connect™ lever.

