


**Upper Door Kit: for Honda Talon 4**

Do not discard packaging until product has been successfully installed.

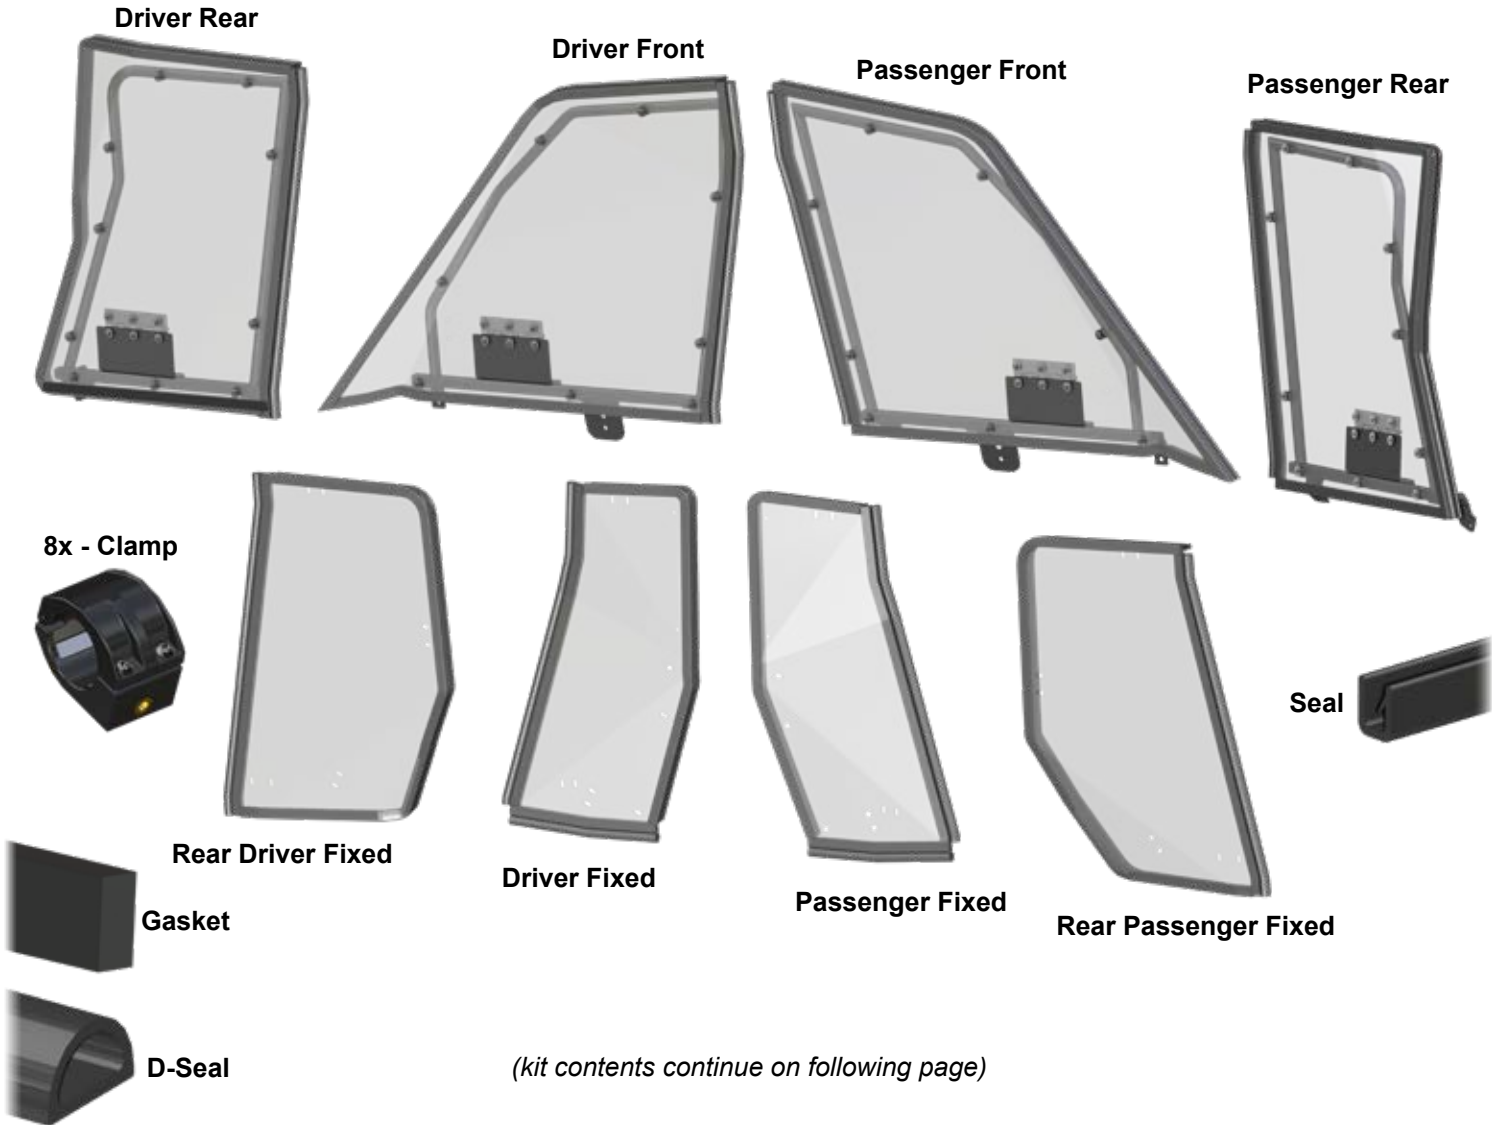

**Door Cleaning:**

- Do not use Rain-X<sup>®</sup>, Plexus<sup>®</sup> or any other protector, wax, or polish.
  - Do not use window cleaning fluids (Windex, 409, etc) or any solvents (gasoline, denatured alcohol, acetone, etc).
  - Never use abrasive cleaners, abrasive pads, or gritty cloths.
  - Never use razor blades, scrapers, squeegees, brushes, etc.
1. Thoroughly rinse Doors to float off dirt and mud.
  2. Using a soft cloth, or microfiber cloth, clean Doors with warm water and a gentle detergent. Baby shampoo, rubbing alcohol, or hand washing soap can also be used.
  3. To prevent water spots, use a chamois to blot Doors dry.

**Need help with your installation?**



sales@superatv.com



www.superatv.com



1-855-743-3427



8:00am - 8:00pm EST M-Th  
8:00am - 7:00pm EST Friday  
9:00am - 2:00pm EST Saturday


**Read instructions and view illustrations before beginning.**

*Thank You*

*For Choosing*

**SUPERATV**.COM<sup>®</sup>

(kit contents continued)

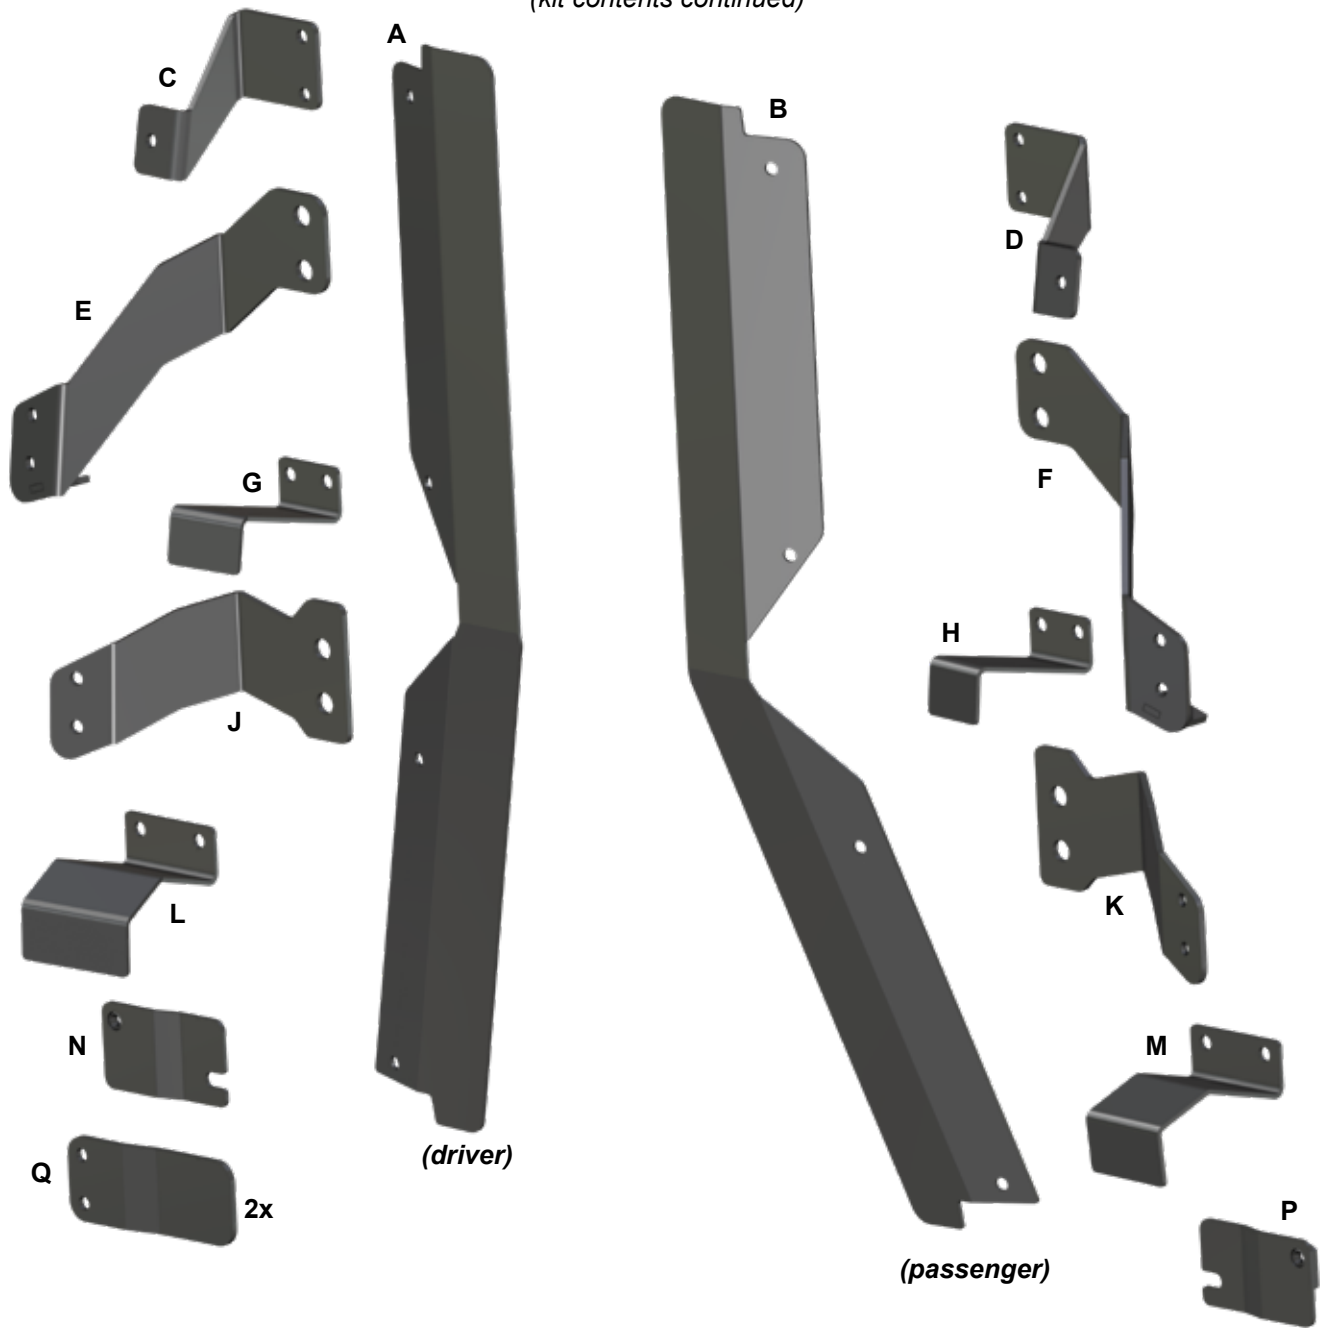

#### Liability Statement

SuperATV's® products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV® to verify that they will work together.

Although SuperATV® has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV® products, user agrees that should damages occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warrantied if item was not installed properly, misused, or modified.

Installing, adding, modifying, or fabricating any factory or aftermarket product to your ATV/UTV may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of certain products on public streets, roads, or highways may be in violation law. The Buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of the product. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you.

The Buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings and instructions and agrees to hold SuperATV® harmless from any damage resulting from failure to adhere to such specifications, warnings and/ or instructions. The Buyer is also responsible to obey all applicable federal, state, and local laws and ordinances when operating his/her vehicle while using this product, and the Buyer agrees to hold SuperATV® harmless from any violation thereof.

- Remove all Window Nets. Will not be reinstalled
- Remove Front Door screws shown.



- Install Passenger Front with hardware shown; tighten.






- Remove screws shown and Panel.



- Remove Passenger Front.
- Repeat steps for driver side.



- Install (N) with hardware shown; tighten.

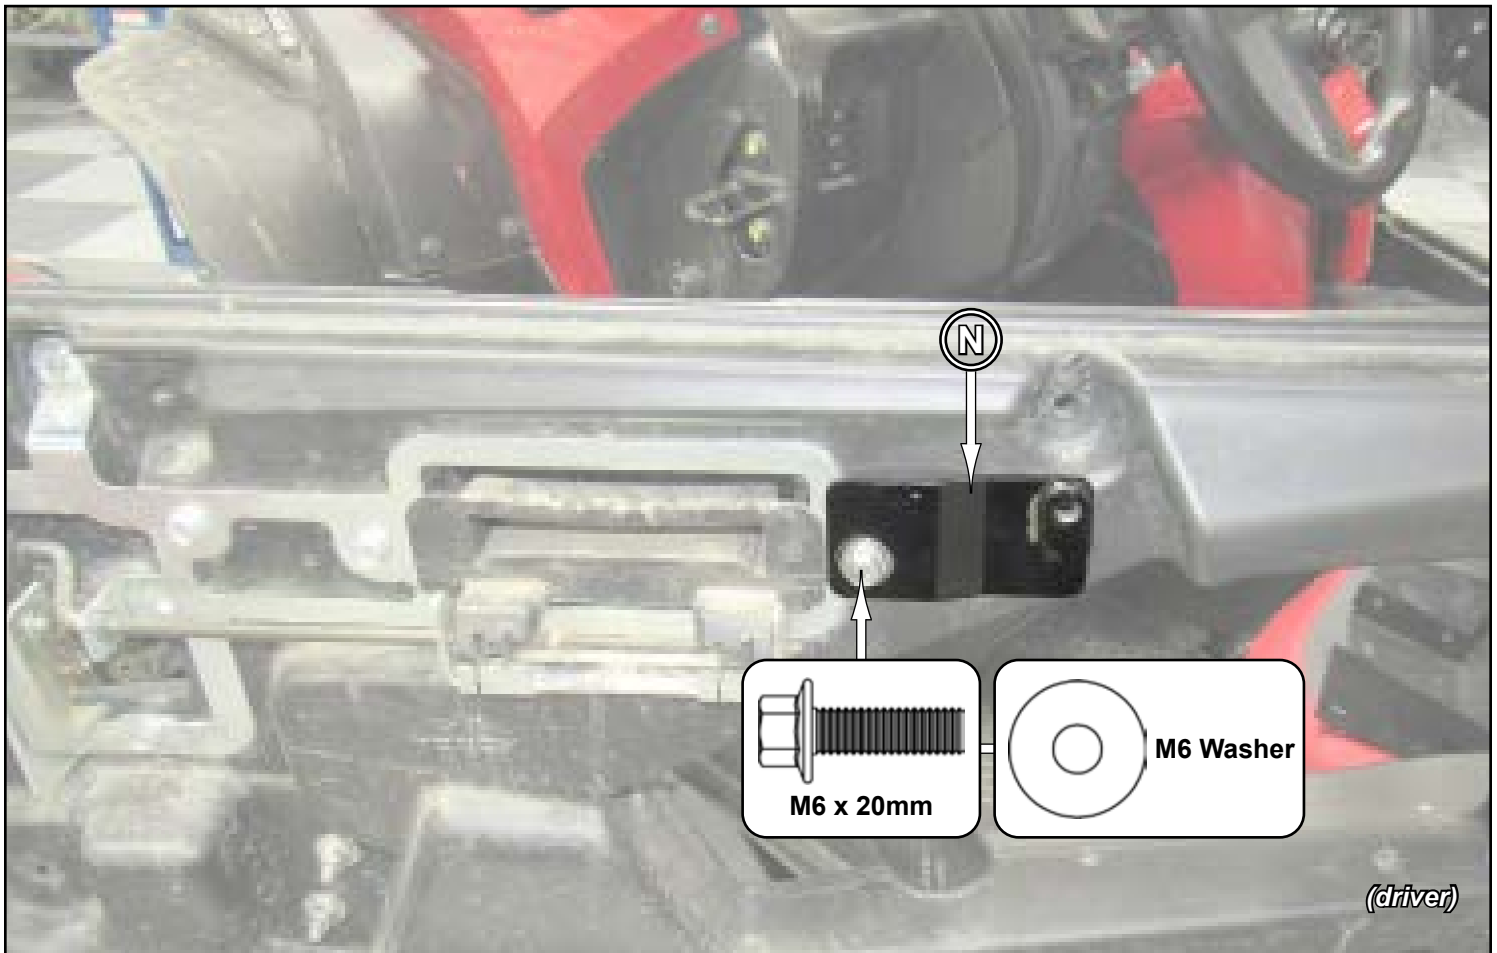

- Reinstall Panel; tighten.
- Repeat steps for passenger side.


Loosen Roof hardware if applicable.

- Install Clamps to Cage in locations shown; Hardware should be snug but not tight.




After installation is complete, rotate Clamps in or out to align Rear Passenger and Passenger Fixed to Passenger Front and Rear Doors. Fully tighten Clamp hardware after adjustments are complete.

- Cut and install Seal to all left and right Brackets shown.


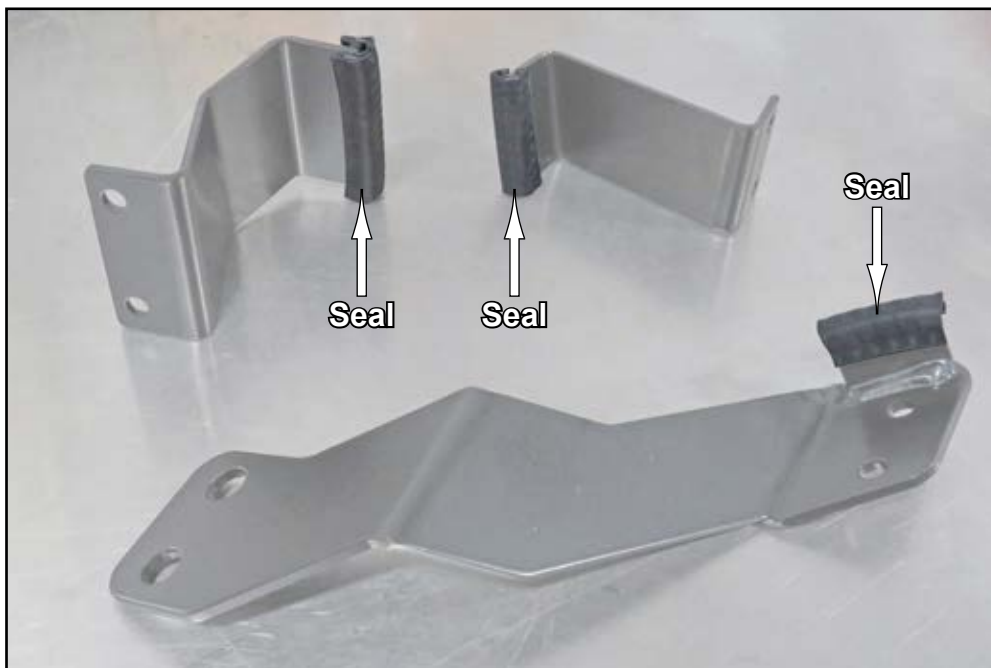





- 
- Diagram illustrating the installation of the passenger seat. The seat is shown in the passenger area of the vehicle. A callout indicates that 2x M6 x 16mm bolts are required for installation. Labels 'D' and 'F' point to specific mounting points on the seat frame.



- Install (B) to Passenger Fixed; tighten.

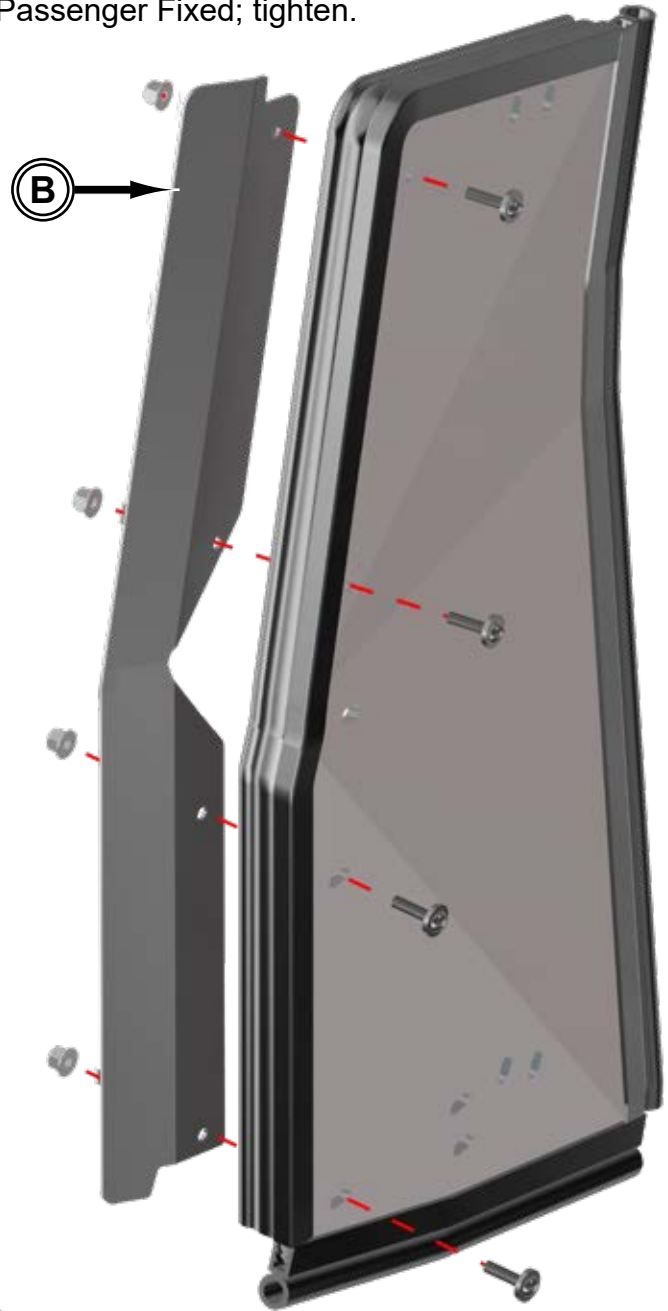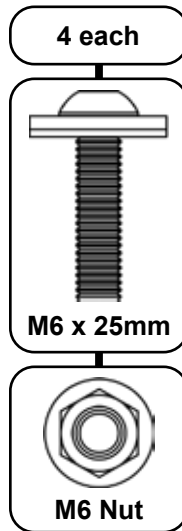


- Cut a piece of D-Seal to 3" and install to (B) in area shown.

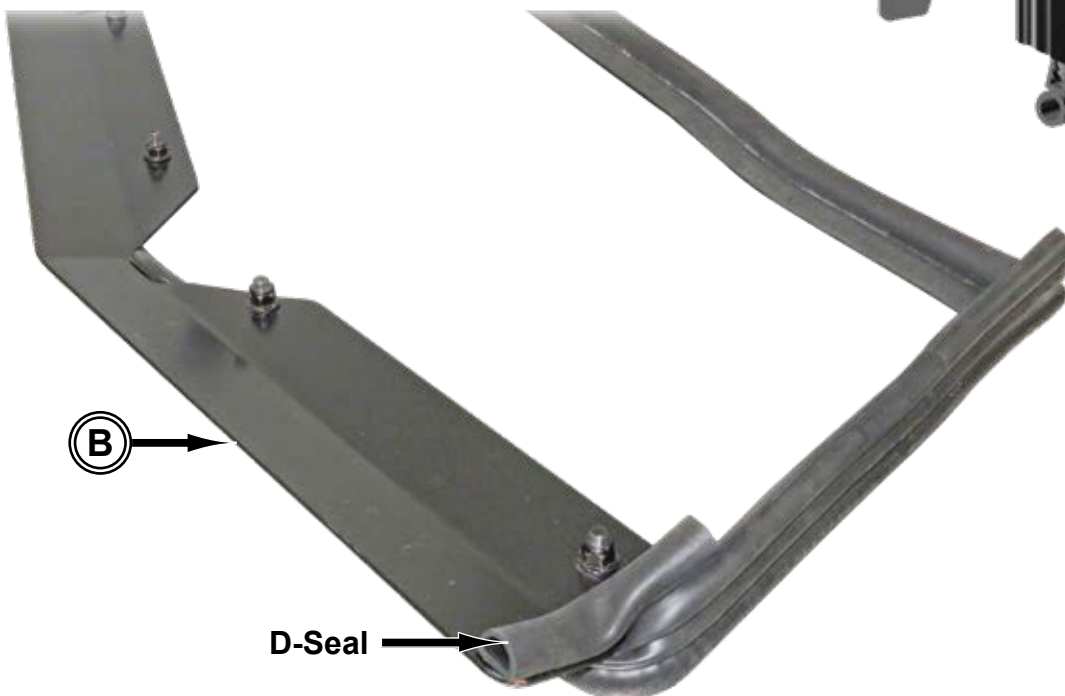







- Install Passenger Fixed to Clamp, (D), and (F) with hardware shown; tighten.

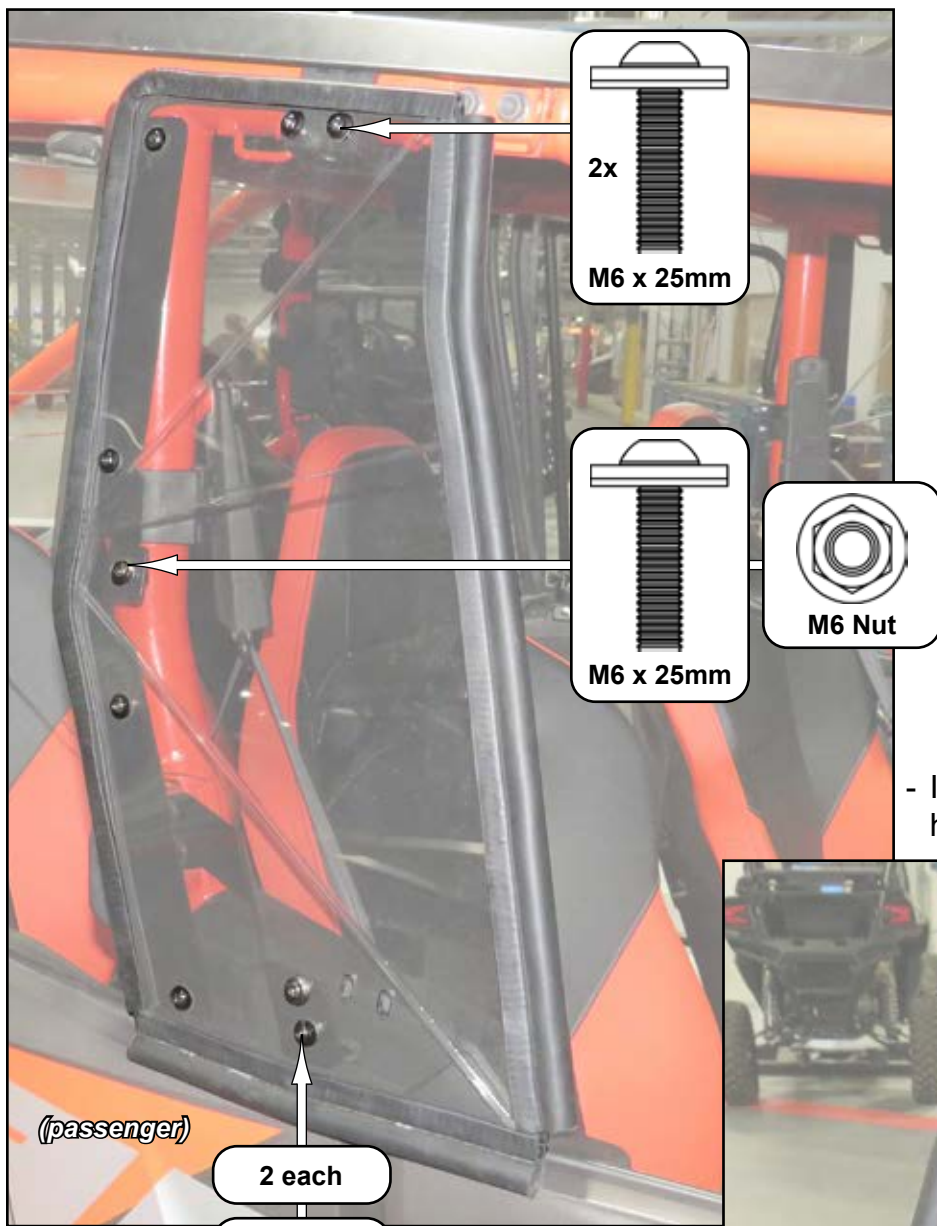


- Install (H) to Passenger Fixed with hardware shown; tighten.

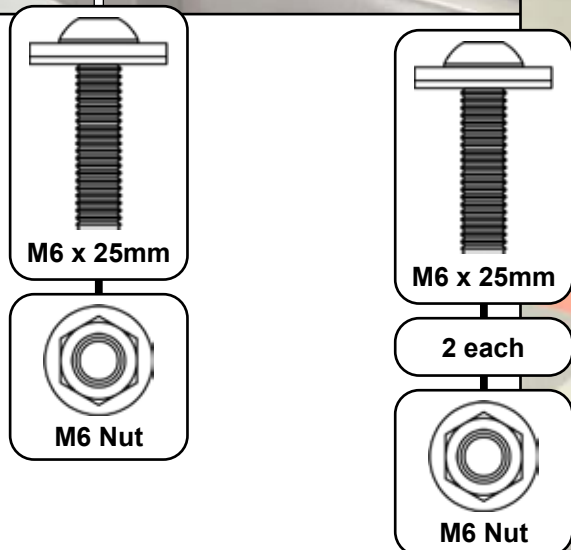

- Remove stock Cage hardware and install (K) with hardware shown; tighten.

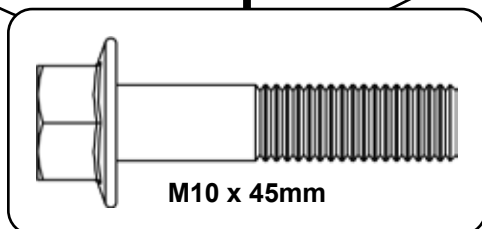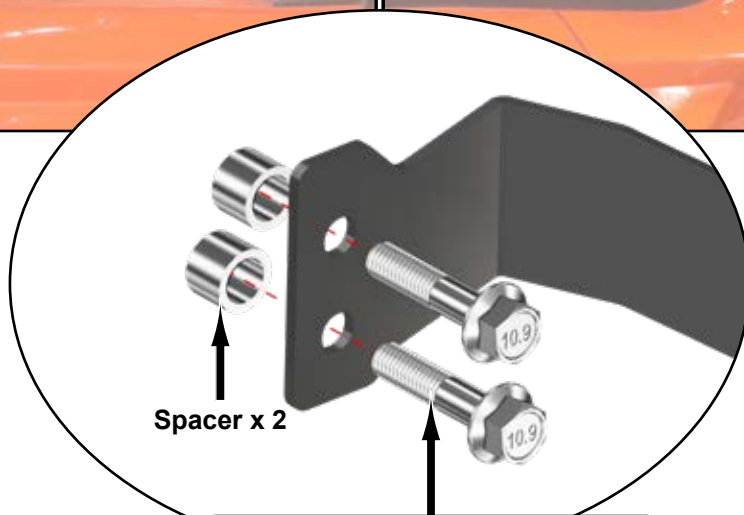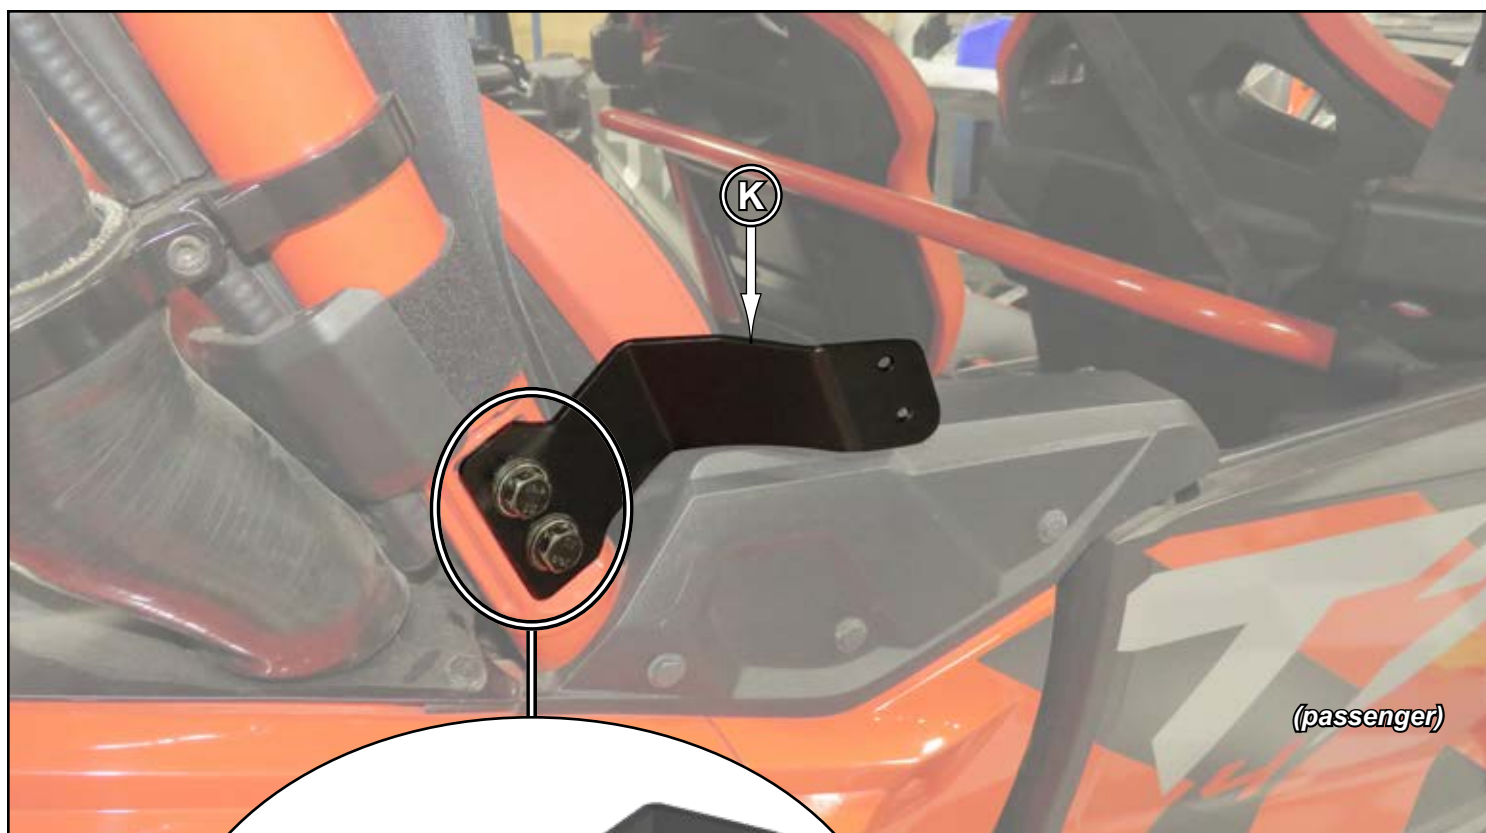

- Install Rear Passenger Fixed to Clamps and (K) with hardware shown; tighten.

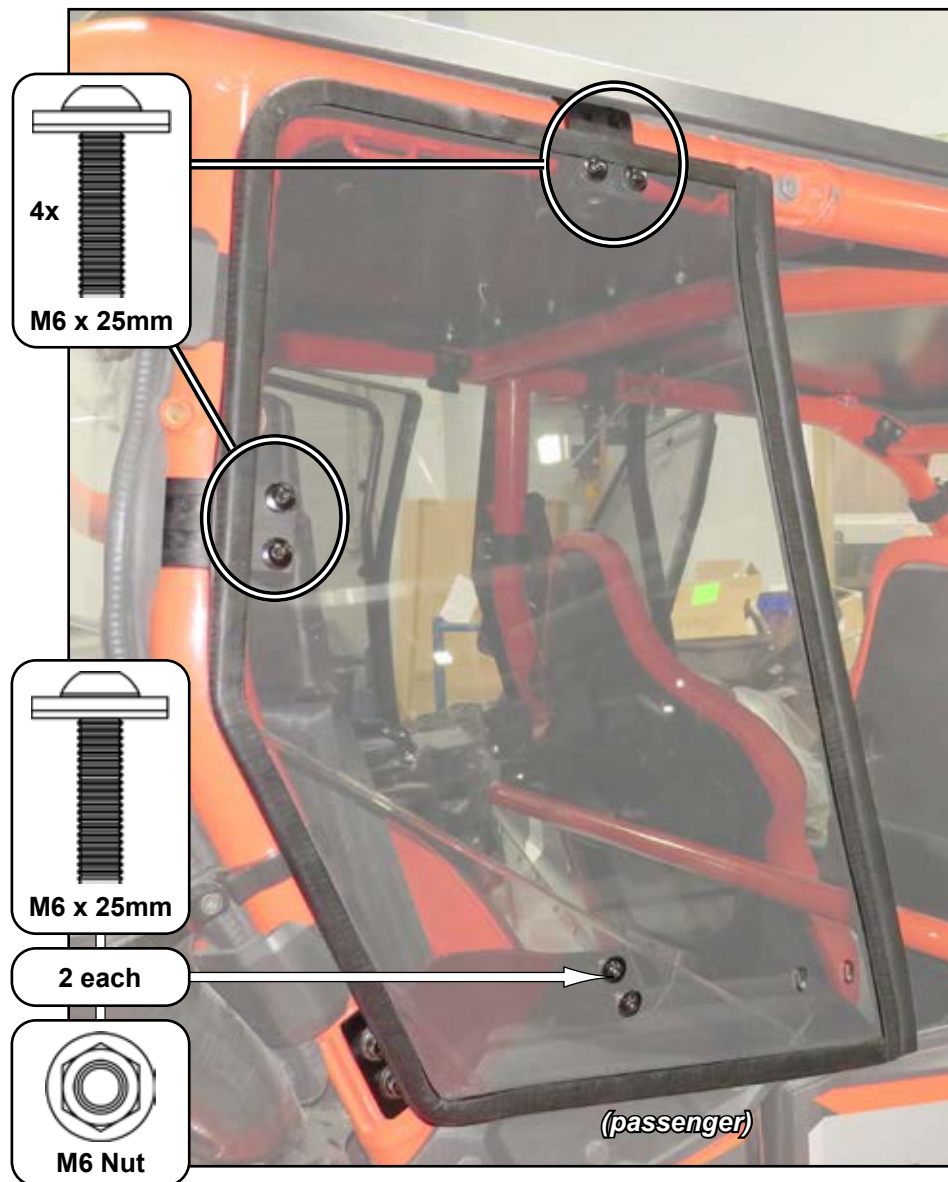


- Install (M) to Rear Passenger Fixed with hardware shown; tighten.






- Install (Q) to Passenger Rear with hardware shown; tighten.

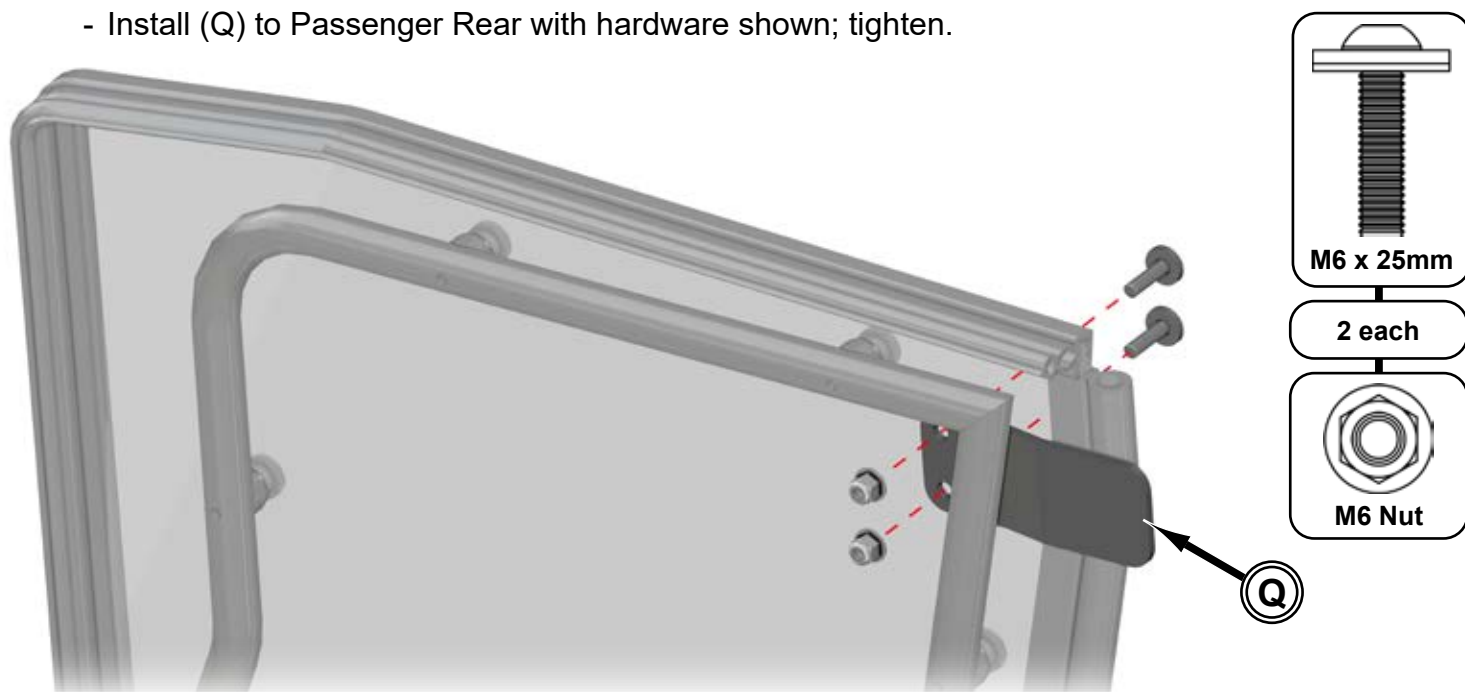

- Install Passenger Rear with hardware shown; tighten.



- Install Passenger Front with hardware shown; tighten.

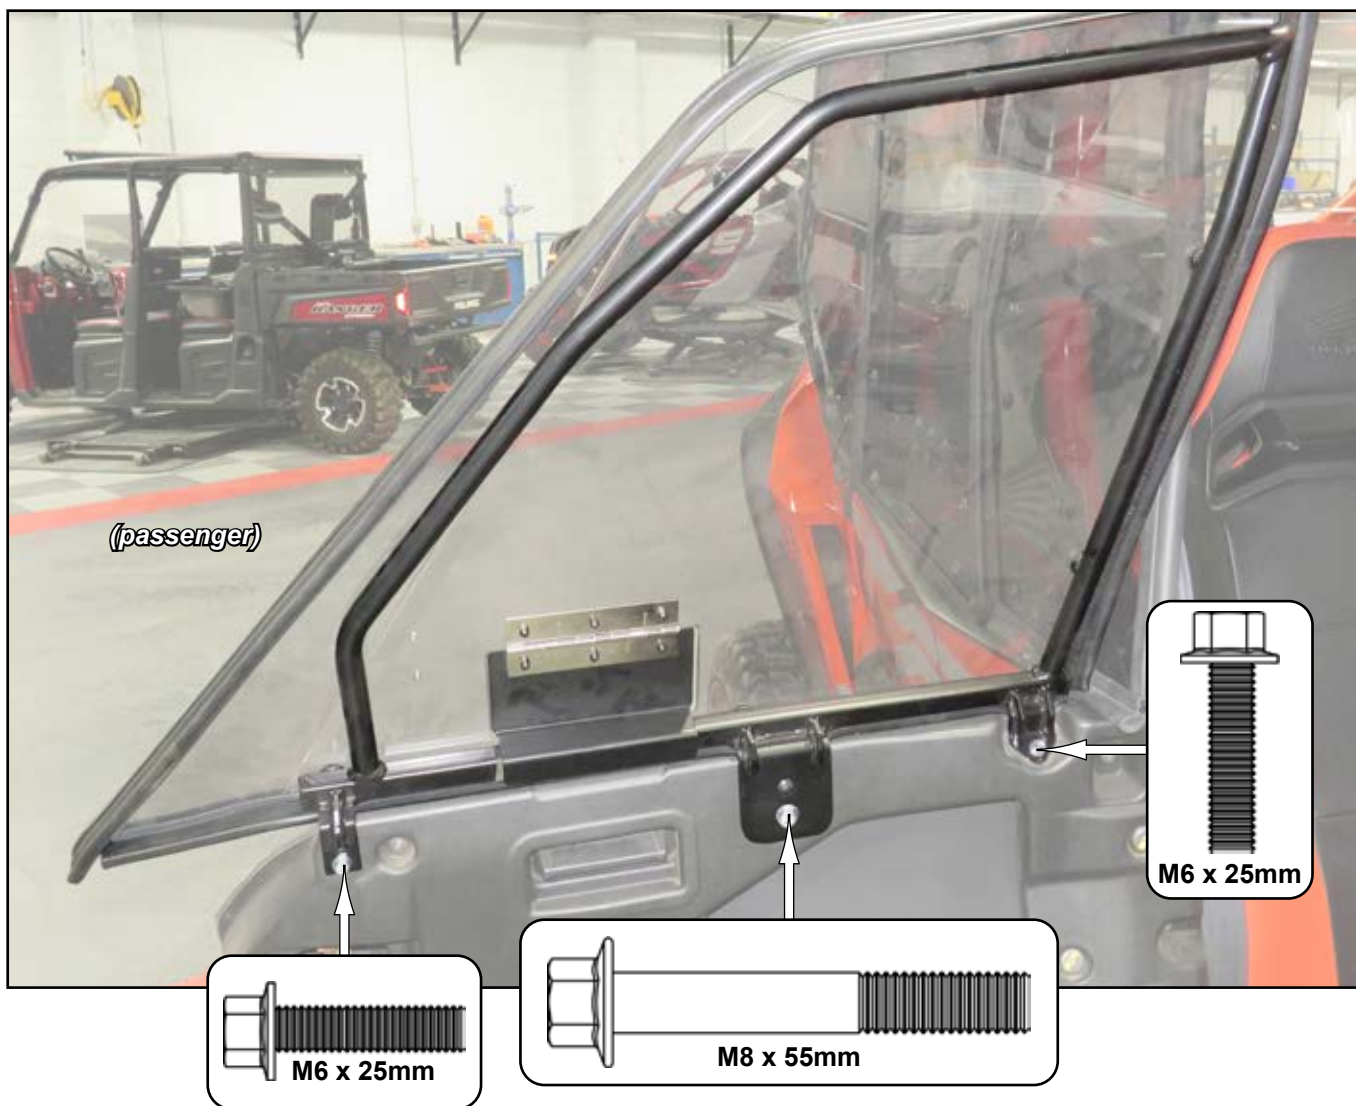


repeat steps for driver side installation

- Align Rear Passenger and Passenger Fixed; see page 6.



- Use an 8mm wrench and remove installed Mounts from Mirrors. Discard Mounts and hardware.

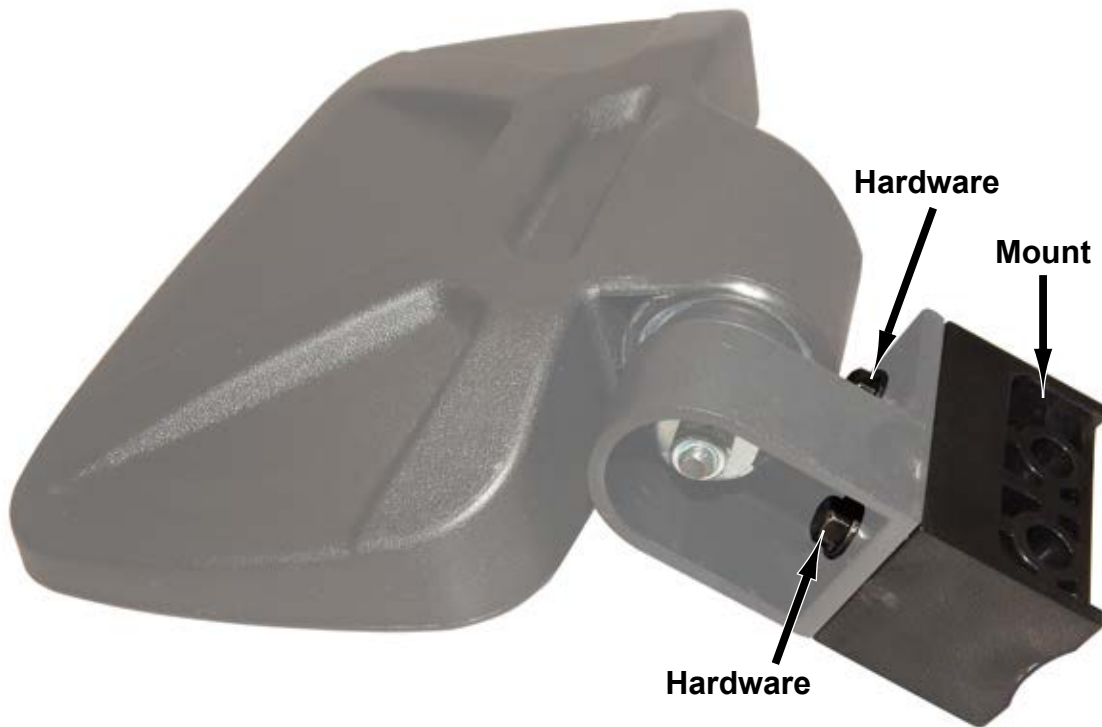

- Install Mirror to Passenger Front with hardware shown; tighten.

